


8 7 6 5 4 3 2 1

D

C

B

A

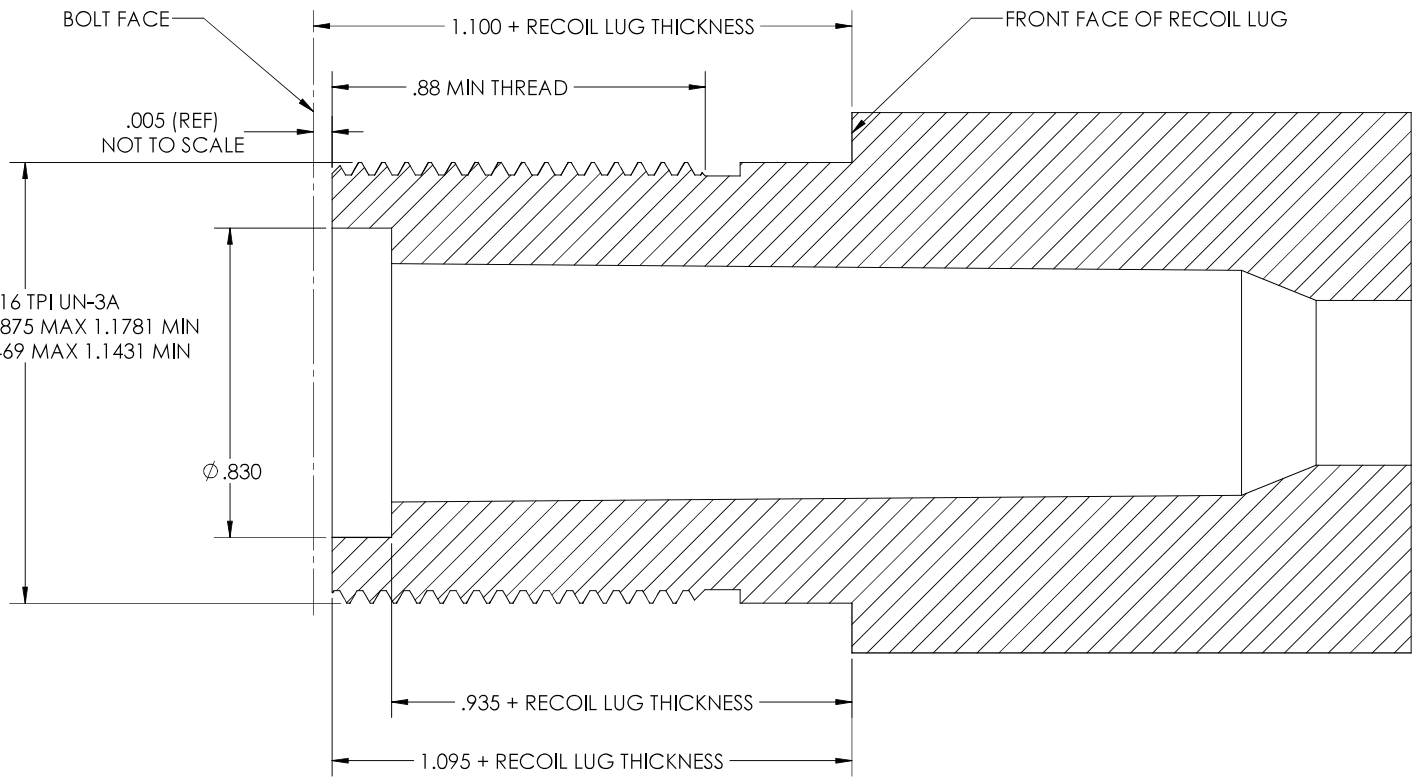

1. DIMENSIONS ALLOW .005 CLEARANCE TO BOLT AS SHOWN
2. STANDARD RECOIL LUGS ARE .300 THICK
3. THIS DRAWING IS PROVIDED FOR REFERENCE ONLY. FITTING OF BARREL TO ACTION SHOULD ONLY BE DONE BY A QUALIFIED GUNSMITH
4. THIS DRAWING APPLIES TO THE TAC DRIVER MODEL ONLY

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 ANGULAR: MACH ±  
 TWO PLACE DECIMAL ± .010  
 THREE PLACE DECIMAL ± .005

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS  
 DRAWING IS THE SOLE PROPERTY OF  
 STILLER.  
 ANY REPRODUCTION IN PART OR AS A  
 WHOLE WITHOUT THE WRITTEN  
 PERMISSION OF STILLER IS PROHIBITED.

	NAME	DATE
DRAWN	JR	05/23/2023
CHECKED	RK	05/23/2023
ENG APPR.	AR	05/23/2023

<b>STILLER</b>		
TITLE:		TENON DRAWING TAC DRIVER
SIZE	PART NO.	REV
B	SDE-TD-13	A01
DO NOT SCALE DRAWING		SHEET 1 OF 1

8 7 6 5 4 3 2 1